

130-MC

MULTI-CHANNEL ACCELEROGRAPH



Multiple Applications, One Solution

The 130-MC Multi-Channel Recorder offers a singular solution for multiple applications, for example, the monitoring of bridges, buildings, and dams.

The MC's rugged design allows for installation in the harsh outdoor environment, and the standard wall-mount design of the enclosure allows the system to be installed out of the way, as opposed to occupying valuable floor space in a building's electrical room.

When using this centralized system, the user has the flexibility to deploy dense sensor arrays around a structure at their discretion. For sites requiring large numbers of recording channels, multiple 130-MCs can be networked together to achieve common triggering of all channels in the system and common time synchronization, establishing a robust solution for large scale projects.

KEY FEATURES

- » 6-18 Integrated Recording Channels
- » 24-Bit Output A/D Resolution
- » IP Based Communications over Ethernet and Asynchronous Serial
- » Embedded/Removable Mass Storage
- » Remote Alerting for both Event and Alarm Triggers

APPLICATIONS

- » Structural Monitoring (Buildings, Bridges, Dams)
- » Dense Accelerometer Arrays

OVERVIEW

Complete with REF TEK's Third Generation Technology, the 130-MC is a robust Multi-Channel Recorder designed around today's modern needs for structural monitoring.

Built-in communication facilities allow for Real-Time and On-Demand data collection. The Multi-Channel Recorder is available in a twelve channel or eighteen channel recording scheme with advanced Telemetry built-in for Real-Time Data collection for every channel (figure 1).

Accommodating the large scale needs of today's market, the 130-MCs, with fully featured network capabilities, can be installed in and around the structure, whether it be a campus, a single building, a bridge or a dam.

The seismic based recording system has a powerful CPU to handle the recording of multiple data streams simultaneously, recording locally to removable compact flash memory cards and transmitting data remotely to a user's PC (in Real-Time or On-Demand). All locally recorded data, along with the written system State-Of-Health files, is accessible to the user for copy and/or deletion from a local or remote PC protected from outside tampering with verified user login and password.

The recorder has three A/D boards, each containing six independent channels for recording. Each A/D board has its own built-in pre-event memory to avoid diminished size as more channels are added to the system. For convenience, the input levels on the A/D are matched to the REF TEK family of accelerometers, models 131A and 131B.

In the case of a power failure, the Multi-Channel Recorder will continue

autonomously with data acquisition, running on up to four internal 12V DC batteries; expected autonomous life-time, with four 20 Amp Hour 12V DC batteries, is 72 hours. The batteries are constantly kept charged by the internal battery charger. If the power fails for more than 72 hours and the system shuts down, upon return of AC power the Multi-Channel Recorder will resume its previous data acquisition mode and begin charging the batteries without any user interaction.

This system provides a user-friendly interface for all command-and-control, data off-loading, and parameter checking. Using our REF TEK GUI based interface software (fig. 2 and fig. 3) with a local PC or remote PC, the user can select all recording parameters from data stream allocation, independent channel selection, sampling rate, and trigger settings, to recording destination, external alarm settings, and automatic notification settings for State-Of-Health messages and recorded events.

For an intuitive analysis of the data, our Strong Motion Data Processing software offers the user options for calculating and displaying such functions as CAV, Raw and Corrected Acceleration, Arias Intensity, Velocity, Displacement, Response Spectra, PSDs, and FFTs. This software (fig. 4) offers the user the option to view all of these calculations in the same screen or individually, and the option to analyze a single channel or all channels from a station simultaneously.

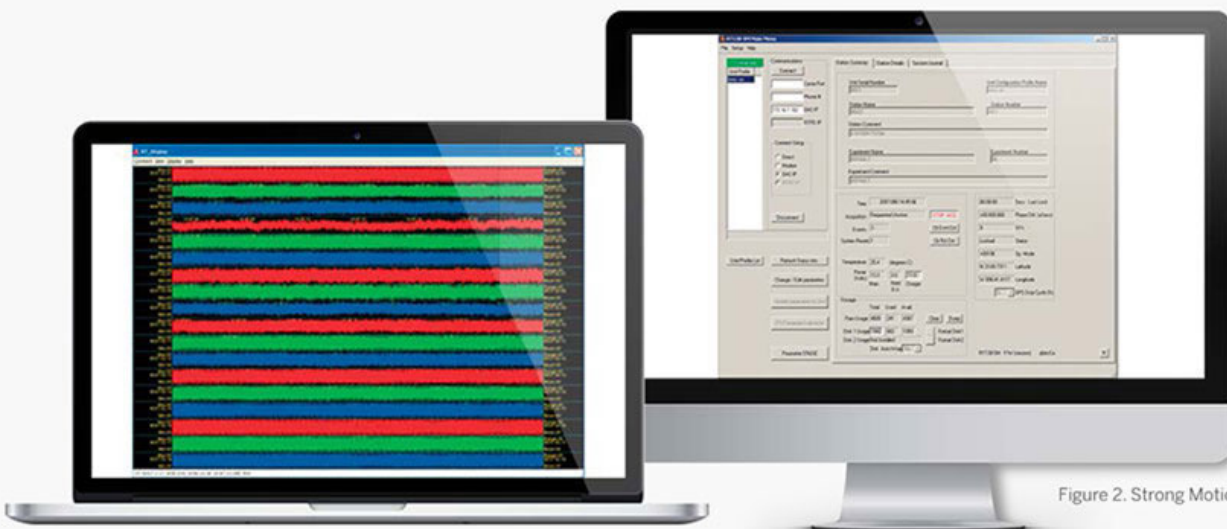


Figure 1. 18 Ch. Real-Time Data Display

Figure 2. Strong Motion User Interface

130-MC

REF TEK MULTI-CHANNEL ACCELEROGRAPH

COMMUNICATIONS	
MODEM PORT	
Standard	ITU-V.90, V-34, V.32 bis
Speed	Modem up to 56 kbps
Serial Interface	Up to 115 Kbps
Power Consumption	100 mW (Active)
Triggered Communication	Auto-dial within 4 sec. of trigger
Alarm Communications	Auto-dial within 4 sec. of alarm conditions: Low Battery, Loss of AC Power, Threshold Exceedence, Defined Time
Auto-Answer	Automatic (always active)
Auxiliary Power	For use with external communications device, 5 programmable time windows
DATA RETRIEVAL	
Protocol	XMODEM, YMODEM on terminal command FTP
TRANSFER	
Rate	> 64 Kbps. Limited by both modem and serial interface speed
ETHERNET PORT	
Standard	10BaseT
Speed	10 mbps
Protocols	TCP/IP, UDP/IP, FTP, RTP

DATA STORAGE	
Format	32-bit integer. Steim1, Steim2 Compression
Type	Removable Compact Flash Card 8 GB /giphy or 16 GB capacity
Storage Life	10 years (without power)
Direct Access	Readable on a PC using a PCMCIA Adapter, USB Flash Reader
Remote Disk Access	Read Contents, Copy, Upload, or Delete files
File Transfer Protocol	XMODEM, YMODEM, FTP
Recovery after Power Loss	The recorder returns to the same recording state after a power cycle, all parameters are saved.

SYSTEM STATUS	
State-Of-Health Display	2 line, 16 character LCD Display: Model number, Firmware Version Number Data & Time, GPS Status, Supply Voltage Internal Temperature, Trigger status, RAM Usage, Disk Usage, Modem Initialization String, Current Modem State
Disk Status Display	LED Indicator (Red/Green)



Figure 3. Parameter Settings



Figure 4. Strong Motion Data Processing Software

130-MC

REF TEK MULTI-CHANNEL ACCELEROGRAPH

MODEL	130-MC12A (P/N 97113-00) 130-MC18A (P/N 97114-00)
CHANNEL SPECIFICATIONS	
No. of Channels	12 in 130-MC12A, 18 in 130-MC18A
Input	±10 VDC full scale
Noise Level	<40 µV P-P (<1 count of an 18 bit system) @ 200 sps
ADC Resolution	24-bit
Noise Power Ratio	21-bit @ 125 sps
Sample Rate	20, 40, 50, 100, 125, 200, 250, 500 sps (User Selectable)
Channel Skew	None, Simultaneous Independent Sampling
Anti-alias Filtering	>120 dB
Temperature Effects	<1% of Full Scale from -20 °C to 70 °C
TIME BASE	
Type	GPS Receiver/Clock plus a Disciplined Oscillator
Accuracy with GPS	±10 µsec, with 3-D Satellite Fix & Locked
Free-Running Accuracy	2.5 ppm from -20 °C to 60 °C
TRIGGERED RECORDING	
Trigger Type	Continuous, Vote, External/Event
VOTE TRIGGER	
Votes	User settable number of: • Votes per Channel • Votes required to determine Trigger/Detrigger User settable threshold for issuing votes Threshold range 0.00001 – 4 g

EXTERNAL TRIGGER	
An external signal can be issued by one station to trigger all other stations in the case of an event.	
Pre-event Time	User settable from 0 to 30 sec.
Post-event Time	User settable from 0 to 60 sec.
Trigger Filter	0.1 to 12 Hz Band Pass Filter

RECORDER INTERCONNECTION	
Interconnected Network Signals	Common GPS Time Trigger Notification IRIG-E
Time Synchronization	Within 10 µsec

MECHANICAL	
Size	24" high x 20" wide x 16" deep (61 cm x 50.8 cm x 40.6 cm)
Volume	4.4 cubic feet

Weight w/o Battery	93 lbs (42.2 Kg)
Cable Feed-thru	Liquid Tight Cable Grips 3/8" (0.95 cm) nominal diameter

WIRING CONNECTION	
Wire Strip	Sensor, Communication with Wire Cage

POWER REQUIREMENTS	
Recorder Power Input Voltage	10 to 15 VDC
System Power Input Voltage	110/220 VAC, 47-63 Hz
Digitizer Consumption	<21 Watt-Hour/Day Per Channel

ORDERING INFORMATION	
PART NO.	DESCRIPTION
97113-00	130-MC12A: Recorder 12-Channel
97114-00	130-MC18A: Recorder 18-Channel
97150-00	130-GPS: Receiver/Clock
97180-00	130-FLASH/8G: Disk, Compact Flash II
97181-00	130-FLASH/16G: Disk, Compact Flash II
97165-00	130-8015-75: Cable, Recorder to GPS
W-88105	Cable, Triaxial Sensor, Plenum
W-88103	Cable, Uniaxial Sensor, Plenum
97257-00	MBLC-X1220P: Battery, 20 amp/hour, Back-Up Power
97192-00	130-Reader-USB: Reader, CF I/II/III, External



Tel Nos. +632.85350758
+632.75013038

Unit 11 Facilites Center
Condominium, 548 Shaw
Blvd, Mandaluyong, 1552
Metro Manila

sumometrics@gmail.com

Contact your local dealer today

©2020-2021, Reftek Systems Inc. All rights reserved. REF TEK is the trademark of Reftek Systems Inc., registered in the United State of America and in other countries.

CUSTOMER SUPPORT

REF TEK products are installed in locations around the world, from urban settings to rainforests to deserts. The environments are often challenging for electronics and REF TEK Systems is committed to providing reliable, practical support. Our team includes seismologists and seismic installation experts as well as engineers and technicians.

Contact support@reftek.com.

REF TEK
SYSTEMS INC.

reftek.com

HIGH RESOLUTION SEISMIC RECORDERS, SENSORS & SOFTWARE

9/1/2021